

Article citation info:

YANG R, ZHAO F, KANG J, LI H, TENG H. Inspection optimization model with imperfect maintenance based on a three-stage failure process. *Eksploatacja i Niezawodność – Maintenance and Reliability* 2015; 17 (2): 165–173, <http://dx.doi.org/10.17531/ein.2015.2.1>.

Ruifeng YANG
Fei ZHAO
Jianshe KANG
Haiping LI
Hongzhi TENG

INSPECTION OPTIMIZATION MODEL WITH IMPERFECT MAINTENANCE BASED ON A THREE-STAGE FAILURE PROCESS

MODEL OPTIMALIZACJI PRZEGLĄDÓW W WARUNKACH NIEPEŁNEJ KONSERWACJI OPARTY O TRÓJFAZOWY PROCES USZKODZENIA

Rolling element bearings are one of the most widely used and vulnerable components in complex systems. The condition monitoring work is very critical for sustaining the system's availability and reducing the maintenance cost. Shock pulse method (SPM) is a common technique to measure the operating condition of rolling bearings as a three color scheme, e.g., green, yellow and red. This paper proposes an inspection model based on a three-stage failure process which aims to optimize the inspection interval of bearings by minimizing the expected cost per unit time. The three-stage failure process divides the bearings life into three stages before failure: good, minor defective and severe defective stages, corresponding to the three color scheme of SPM. Considering the need to lubricate bearings when the minor defective stage is identified by inspection in industrial applications, we assume that maintenance at the time of inspection identifying the minor defective stage is imperfect. The concept of proportional age reduction is used to model the effect of imperfect maintenance on the instantaneous rates of the minor defective stage, the severe defective stage and failure. Perfect maintenance however is carried out if inspection detects bearings being in the severe defective stage. Failure can be found once it occurs and replacement has to be implemented immediately. Finally, a numerical example is presented to illustrate the effectiveness of the proposed model.

Keywords: delay time modeling, three-stage failure process, inspection, imperfect maintenance, proportional age reduction.

Łożyska toczne są jednymi z najczęściej stosowanych i jednocześnie najbardziej narażonych na uszkodzenia części składowych układów złożonych. Monitorowanie stanu odgrywa bardzo istotną rolę w utrzymaniu dostępności układów i zmniejszeniu kosztów ich obsługi. Metoda impulsów uderzeniowych (SPM) jest powszechnie stosowaną techniką służącą do pomiaru stanu pracy łożysk tocznych, który reprezentowany jest za pomocą kodu trzech kolorów, na przykład, zielonego, żółtego i czerwonego. W artykule zaproponowano model przeglądów oparty na trójfazowym procesie uszkodzenia, który ma na celu optymalizację częstotliwości przeglądów łożysk poprzez minimalizację oczekiwanych kosztów przypadających na jednostkę czasu. Pojęcie trójfazowego procesu uszkodzenia pozwala podzielić żywotność łożyska na trzy fazy przed wystąpieniem uszkodzenia: fazę dobrego stanu, fazę drobnych defektów i fazę poważnych defektów. Podział ten odpowiada kodowi trzech kolorów SPM. Biorąc pod uwagę konieczność smarowania łożysk po zdiagnozowaniu, podczas przeglądu w warunkach przemysłowych, wystąpienia fazy drobnych defektów, zakładamy, że konserwacja w czasie takiego przeglądu jest konserwacją niepełną. Koncepcja proporcjonalnego obniżenia wieku służy do modelowania wpływu niepełnej konserwacji na chwilowe wartości intensywności fazy drobnych defektów, fazy poważnych defektów oraz uszkodzeń. Gdy podczas przeglądu stwierdzi się, że łożysko jest w fazie poważnych defektów, przeprowadza się pełną konserwację. Uszkodzenie zostaje wykryte zaraz po jego wystąpieniu, i wtedy należy dokonać natychmiastowej wymiany łożyska. Pod koniec artykułu, przedstawiono przykład numeryczny, który ilustruje wydajność proponowanego modelu.

Słowa kluczowe: Modelowanie metodą czasu zwłoki, trójfazowy proces uszkodzenia, przegląd, konserwacja niepełna, proporcjonalne obniżenie wieku.

1. Introduction

Rolling element bearings are widely used in industrial rotating machinery, for example wind turbine and helicopter; and they are also

considered as a type of critical components. Unexpected bearing faults are one of the most frequent reasons for machine breakdown and may result in significant economic losses. Therefore, taking appropriate and effective maintenance activities is required for achieving higher

availability and lower operational cost. Numerous maintenance policies have been implemented on the bearings to prevent the occurrence of failure [10]. Preventive maintenance (PM) is perhaps one of the most popular maintenance policies, by which maintenance activities are executed with a planned interval aiming at preventing potential failures from occurring [3, 13]. For most practical situations, PM is still a dominant maintenance policy due to its easy implementation.

Inspection as an important PM activity can or could reveal the status of the system being inspected, thus it helps maintenance engineers make decisions to avoid the occurrence of failure [20]. Inspections may be performed discretely with a periodic or aperiodic interval by using inspection instrument or continuously by modern condition monitoring devices. In industrial applications, inspectors carry out inspection activities on bearings mostly utilizing the inspection instrument, such as, SPM (Shock Pulse Method) instrument.

SPM, developed by SPM instrument AB Company in the early 1970s and originated in Sweden, is a patented technique and has achieved wide acceptance as a quantitative method for efficiently inspecting the condition of bearings [6, 12]. Through sampling the shock pulse amplitude of bearings over a period of time and displaying the maximum value dB_m and the carpet value dB_c , SPM provides a direct normalized shock value indicating the bearing operating state and lubrication condition [7]. Accordingly, maintenance engineers can make decisions in terms of the final shock value.

However, how often do engineers inspect the bearings or the determination of inspection interval is still a key issue. Traditionally in most industries, the inspection interval is usually determined by engineers' experience or by the manufacturer's recommendation [5]. However, such determination is conservative and undesired although it is easy to implement. Many researchers have developed numerous PM models to find the optimal inspection interval under various modeling assumptions [1, 8, 9]. However, in contrast with other PM models [3, 13], the models based on the delay-time concept have been proved to have the obvious advantages for optimizing the inspection interval since the delay-time technique can directly model the relationship between the inspection intervention and the system performance, see [15, 17, 22].

The delay time concept was first introduced by Christer in 1976 [2], which defines the failure process as a two-stage failure process, namely normal stage and delay time stage. The normal stage is from new to an initial point that a defect can be first identified by an inspection and the delay time stage from this initial point to failure [19]. By the definition of delay time concept, the plant can be in one of two states before failure, namely normal and defective. A defect can be identified if the inspection is carried out during the delay-time stage. Many inspection and PM models, especially successful case studies based on the two-stage failure process have been reported with actual applications in industry [18, 19].

However, some systems may be described more than two states before failure in industrial applications. For example, SPM indicates the bearing condition before failure as the condition scale (namely Green-Yellow-Red scale) depending on the shock value. Green with the shock value range 0-20 denotes bearing is normal, a minor defective bearing is represented by Yellow (20-35) and the shock value range 35-60 indicates a severe defective bearing, shown by Red. Then the state of bearing before failure may be in one of these three states, namely normal, minor defective, and severe defective. Considering this industrial scenario, Wang [16] firstly extended the two-stage failure process into a three-stage failure process, which is closer to the practical situation and provides more decision options for different states. In the work [16], the inspection interval is shortened to be half of the current interval to more frequently inspect the system when the minor defective stage is identified by inspection, but immediately replace the system if it is in the severe defective stage. Wang et al. [23] further extended the work [16] by considering a two-level inspection

policy with PM and delaying the maintenance once the severe defective stage is identified and the time interval to the next PM is less than a threshold level. However, perfect maintenance for the defective system is assumed in the works [16, 23].

After the condition of bearing is measured utilizing the SPM instrument, maintenance engineers will carry out different decisions depending on the shock value. When the shock value is less than 20, namely the condition of bearing is good, do nothing and check the bearing until the next inspection. If the bearing is found to be in the minor defective stage, i. e., the shock value is within the interval (20, 35), lubrication is in need; however, replacement needs to be done immediately once the shock value exceeds 35 as replacement is generally a direct measure for bearings, where replacement can be viewed as renewing the bearing. However, when the bearing is found to be in the minor defective stage by inspection, being in yellow, lubrication is a common practice adopted in industry as a way to prolong the life of the system. The lubrication problem in PM models based on the delay time concept has been presented by Wang [21], which considered integrately the routine service (RS), inspection, condition monitoring and preventive replacement. However, the lubrication is only implemented when the bearing is identified to be in the minor defective stage in the industry, rather than a part of inspection, or of repair or replacement. The lubrication aims at preventing the defects from arising, which will affect the instantaneous rates of defects and failure such that it can be regarded as imperfect maintenance. Wang et al. [14] have considered imperfect maintenance which is based on the two-stage failure process. However, the inspection model considering imperfect maintenance based on the three-stage failure process is closer to reality but not developed. To model the imperfect maintenance at the time of inspection identifying the minor defective stage, we borrow the concept of proportional age reduction (PAR), which has been widely utilized in imperfect maintenance optimization modeling [4].

The contributions of this work are as follows: (1) the system deterioration is subject to the three-stage failure process; (2) imperfect maintenance is considered after the system is found to be in the minor defective stage; (3) an inspection model with imperfect maintenance based on the three-stage failure process is presented.

The remaining parts of the paper are organized as follows: Section 2 presents the problem description and modeling assumptions. Section 3 formulates all possible renewal probabilistic models based on the three-stage failure process. The cost model is developed to find the optimal inspection interval by minimizing the expected cost per unit time in Section 4. Section 5 gives numerical examples and some discussions. Finally, Section 6 concludes the paper and the future researches are suggested.

2. Problem description and modeling assumptions

2.1. Problem description

The bearing is regarded as a single component system subject to a single failure mode and in the following part we refer to it simply as the system. The system is inspected periodically with the interval T to obtain the shock value and measure the operating condition. When the shock value of the system falls into green, namely less than 20, do nothing. If the shock value indicates that the system is in the minor defective stage, lubrication is carried out to prolong the system life, regarding as imperfect maintenance. However, the system needs to be replaced immediately once it is revealed by inspection to be in the severe defective stage with the shock value in the interval (35, 60). Failure can be found once it occurs such that replacement needs to be made immediately with an identical one. Replacement can restore the system to a new condition. However, imperfect maintenance at the time of inspection identifying the minor defective stage will affect the instantaneous rates of the minor defective stage, the severe defective

stage and failure at the next maintenance stage [14]. Fig.1 shows an illustration of the three-stage failure process based on SPM.

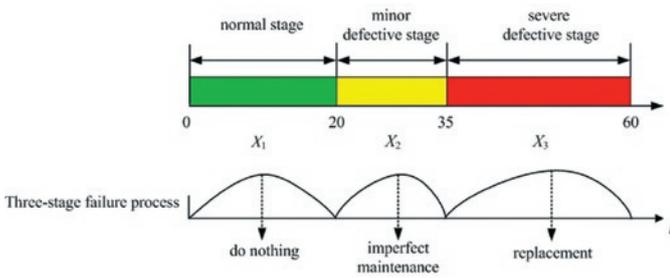


Fig. 1. Illustration of three-stage failure process based on SPM

2.2. Modeling assumptions

The following assumptions are proposed for a modeling purpose. Most assumptions have been explained in the previous section or problem description [14, 18, 19].

- (1) The failure process of the system is divided into three stages, namely normal, minor and severe defective stages. These three stages are assumed to be independent.
- (2) The system is inspected periodically with an interval T . There is no downtime caused by inspection since the system is checked online.
- (3) Inspection is perfect such that the system condition can be identified with a probability 100%.
- (4) When the inspection detects the system being in the normal stage, do nothing.
- (5) If the system is found to be in the minor defective stage, we consider implementing lubrication, regarding as imperfect maintenance, which will affect the instantaneous rates of the minor defective stage, the severe defective stage and failure at the next maintenance stage.
- (6) Once the system is found to be in the severe defective stage, replacing is always carried out immediately.
- (7) The failure of the system can be observed immediately and replacement will be carried out at once.
- (8) The system after replacement is viewed as new.

The following notation will be used in the subsequent modelling:

X_n	random variable representing the duration of the n th stage, $n=1, 2$ and 3
T	inspection interval
t_i	time of the i th imperfect maintenance due to the minor defective stage identification
ρ	improvement factor
Δ_i	accumulated age
T_f	time to failure
T_{pm}	time to imperfect maintenance due to the minor defective stage identification by an inspection
T_{ps}	time to the severe defective stage identification
$\lambda_{i+1}(x)$	instantaneous rate of the minor defective stage after the i th imperfect maintenance
$\gamma_{i+1}(y)$	instantaneous rate of the severe defective stage after the i th imperfect maintenance
$h_{i+1}(z)$	failure rate after the i th imperfect maintenance
$f_{X_{1,i+1}}(x)$	probability density function (pdf) of the minor defective stage after the i th imperfect maintenance
$f_{X_{2,i+1}}(y)$	pdf of the severe defective stage after the i th imperfect maintenance
$f_{X_{3,i+1}}(z)$	pdf of failure after the i th imperfect maintenance

$F_{X_{2,i+1}}(y)$ cumulative distribution function (cdf) of the severe defective stage after the i th imperfect maintenance

$F_{X_{3,i+1}}(z)$ cdf of failure after the i th imperfect maintenance

$P_f((i-1)T, iT)$ probability of a failure renewal in $((i-1)T, iT)$

$P_m(iT)$ probability of imperfect maintenance of the minor defective stage at iT

$P_s(iT)$ probability of an inspection renewal due to the severe defective stage identification at iT

C_s average cost per inspection

C_f average cost per failure

C_{pm} average cost per imperfect maintenance

C_p

s average cost caused by an inspection renewal due to identifying the severe defective stage

$C(T)$ expected cost per unit time

$EC(T)$ expected renewal cycle cost

$EC_f(T)$ expected cost caused by a failure renewal

$EC_s(T)$ expected cost caused by an inspection renewal

$EL(T)$ expected renewal cycle length

$EL_f(T)$ expected length caused by a failure renewal

$EL_s(T)$ expected length caused by an inspection renewal

3. Probabilistic models of a failure renewal and an inspection renewal considering imperfect maintenance

In order to establish the cost model using the renewal theorem, two renewal scenarios at the end of a renewal cycle, namely a failure renewal and an inspection renewal, should be considered. The probability models for both renewals need to be formulated as [16, 19] for a modelling purpose. Since it is assumed that imperfect maintenance is applied when the system is found to be in the minor defective stage, we introduce the PAR model firstly.

3.1. The PAR model

The PAR model assumes that the i th imperfect maintenance at t_i will shorten the length of the last operation time from $t_i - t_{i-1}$ to $\rho(t_i - t_{i-1})$ [4]. The effective age after the i th imperfect maintenance is $t - \rho t_i$ ($t > t_i$) that indicates that it has no relationship with the maintenance history prior to t_i . So the difference between $t - \rho t_i$ and $t - t_i$, $\Delta_i = (1 - \rho)t_i$, is defined as the accumulative age which will affect the instantaneous rate of each stage for the $(i+1)$ th maintenance stage [14].

If the i th imperfect maintenance for the minor defective stage is triggered at t_i , then the accumulative age is:

$$\Delta_i = (1 - \rho)t_i \tag{1}$$

The instantaneous rate of the minor defective stage after the i th imperfect maintenance can be defined as:

$$\lambda_{i+1}(x) = \lambda(x + \Delta_i) \tag{2}$$

where $x = t - t_i$.

The instantaneous rate of the severe defective stage after the i th imperfect maintenance can be defined as:

$$\gamma_{i+1}(y) = \gamma(y + \Delta_i) \tag{3}$$

where $y = t - t_i - x$.

Furthermore, the failure rate after the i th imperfect maintenance can be defined as:

$$h_{i+1}(z) = h(z + \Delta_i) \tag{4}$$

where $z = t - t_j - x - y$.

Here, $\rho = 1$ corresponds to the maintenance at the minor defective stage is perfect and $\rho = 0$ means the maintenance is minimal. However, the maintenance is imperfect if $0 < \rho < 1$.

Because the probability density function (pdf) of the system can be formulated as $f(t) = \lambda(t)e^{-\int_0^t \lambda(s)ds}$, the pdf of the minor defective stage after the i th imperfect maintenance is expressed as:

$$\begin{aligned} f_{X_{1,i+1}}(x) &= \lambda_{i+1}(x) \exp(-\int_0^x \lambda_{i+1}(s)ds) = \lambda(x + \Delta_i) \exp(-\int_0^x \lambda(s + \Delta_i)ds) \tag{5} \\ &= \lambda(x + \Delta_i) \exp(-\int_{\Delta_i}^{x+\Delta_i} \lambda(s)ds) \end{aligned}$$

Using the similar way, the pdf of the severe defective stage after the i th imperfect maintenance is given as:

$$\begin{aligned} f_{X_{2,i+1}}(y) &= \gamma_{i+1}(y) \exp(-\int_0^y \gamma_{i+1}(s)ds) = \gamma(y + \Delta_i) \exp(-\int_0^y \gamma(s + \Delta_i)ds) \tag{6} \\ &= \gamma(y + \Delta_i) \exp(-\int_{\Delta_i}^{y+\Delta_i} \gamma(s)ds) \end{aligned}$$

Moreover, the pdf of failure after the i th imperfect maintenance is formulated as:

$$\begin{aligned} f_{X_{3,i+1}}(z) &= h_{i+1}(z) \exp(-\int_0^z h_{i+1}(s)ds) = h(z + \Delta_i) \exp(-\int_0^z h(s + \Delta_i)ds) \tag{7} \\ &= h(z + \Delta_i) \exp(-\int_{\Delta_i}^{z+\Delta_i} h(s)ds) \end{aligned}$$

The cumulative distribution function (cdf) of the severe defective stage and failure can be derived from Eqs. (6) and (7) as:

$$\begin{aligned} F_{X_{2,i+1}}(y) &= 1 - \exp\left(-\int_{\Delta_i}^{y+\Delta_i} \gamma(s)ds\right) \\ F_{X_{3,i+1}}(z) &= 1 - \exp\left(-\int_{\Delta_i}^{z+\Delta_i} h(s)ds\right) \end{aligned} \tag{8}$$

3.2. Probabilities of a failure renewal and an inspection renewal

Since the imperfect maintenance is done at the time of the minor defective stage identification by inspection and after the imperfect maintenance, the instantaneous rates of both defective stages and failure change, we should model the probability for a failure renewal and an inspection renewal based on the PAR model.

(1) Probability of imperfect maintenance due to the identification




Fig. 2. An imperfect maintenance at iT since the minor defective stage is identified, and the last imperfect maintenance occurs at $t_j = jT$

of the minor defective stage

The minor defective stage is identified at iT and the last imperfect maintenance at t_j when the system restarts the three-stage failure proc-

ess, as shown in Fig. 2. It leads from assumption (3) that inspection is perfect, the duration of the normal stage is within $(i-j)T$ and $(i-j)T$. The minor defective stage is more than $(i-j)T - x$, where x is the duration of the normal stage. Accordingly, the probability of identifying the minor defective stage at iT since the last imperfect maintenance at jT is given as:

$$\begin{aligned} P(T_{pm} = iT | \text{since the last imperfect maintenance at } jT) &= P((i-j-1)T < x < (i-j)T, y > (i-j)T - x) \tag{9} \\ &= \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x)(1 - F_{X_{2,j+1}}((i-j)T - x))dx \end{aligned}$$

Summing over all possibilities in Eq. (9) for the last imperfect maintenance, namely $j = 0, \dots, i-1$, we have the probability of the minor defective stage identified at iT , $P_m(iT)$, is given as:

$$\begin{aligned} P_m(iT) &= \sum_{j=0}^{i-1} P_m(jT)P(T_{pm} = iT | \text{since the last imperfect maintenance at } jT) \tag{10} \\ &= \sum_{j=0}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x)(1 - F_{X_{2,j+1}}((i-j)T - x))dx \end{aligned}$$

where $P_m(0) = 1, j=0$ means there is no imperfect maintenance before renewal, $i=1, \dots$

(2) Probability of a failure renewal




Fig. 3. The system fails in $((i-1)T, iT)$ since the last imperfect maintenance at jT

If a failure occurs at $T_f, T_f \in ((i-1)T, iT)$ since the last imperfect maintenance at jT , the system is renewed immediately according to assumption (7). Since it is assumed that inspection is perfect to identify the state of the system, the minor defective stage has been ended within $((i-1)T, iT)$ before a failure, as shown in Fig. 3. Similar to the derivation of Eq. (9), the probability of a failure renewal since the last imperfect maintenance at jT is given by:

$$\begin{aligned} P((i-1)T < T_f < iT | \text{since the last imperfect maintenance at } jT) &= P((i-j-1)T < x < (i-j)T, 0 < y < (i-j)T - x, 0 < z < (i-j)T - x - y) \tag{11} \\ &= \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x) \int_0^{(i-j)T-x} f_{X_{2,j+1}}(y) F_{X_{3,j+1}}((i-j)T - x - y) dy dx \end{aligned}$$

Then the probability of a failure renewal in $((i-1)T, iT)$, $P_f((i-1)T, iT)$ is given as:

$$\begin{aligned} P_f((i-1)T, iT) &= \sum_{j=0}^{i-1} P_m(jT)P((i-1)T < T_f < iT | \text{since the last imperfect maintenance at } jT) \tag{12} \\ &= \sum_{j=0}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x) \int_0^{(i-j)T-x} f_{X_{2,j+1}}(y) F_{X_{3,j+1}}((i-j)T - x - y) dy dx \end{aligned}$$

The pdf of a failure in $((i-1)T + z, (i-1)T + z + dz), z \in (0, T)$ can be derived from Eq. (12) as:

$$\begin{aligned}
 & P_f((i-1)T + z, (i-1)T + z + dz) / dz \\
 &= \sum_{j=0}^{i-1} P_m(jT) P((i-1)T + z < T_f < (i-1)T + z + dz) / dz \\
 &= \sum_{j=0}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j-1)T+z} f_{X_{1,j+1}}(x) \int_0^{(i-j-1)T+z-x} f_{X_{2,j+1}}(y) f_{X_3}((i-j-1)T + z - x - y) dy dx
 \end{aligned} \tag{13}$$

(3) Probability of an inspection renewal




Fig. 4. The system is replaced at the time of the severe defective stage identification iT since the last imperfect maintenance at jT

If inspection detects the system being in the severe defective stage at iT since the last imperfect maintenance at jT , then from assumption (3), the minor defective stage must end within the interval $((i-1)T, iT)$, as shown in Fig. 4. Then we have the probability of an inspection renewal due to identifying the severe defective stage at iT under the condition that the last imperfect maintenance is carried out at jT .

$$\begin{aligned}
 & P(T_{ps} = iT | \text{since the last imperfect maintenance at } jT) \\
 &= P((i-j-1)T < x < (i-j)T, 0 < y < (i-j)T - x, z > (i-j)T - x - y) \\
 &= \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x) \int_0^{(i-j)T-x} f_{X_{2,j+1}}(y) (1 - F_{X_{3,j+1}}((i-j)T - x - y)) dy dx
 \end{aligned} \tag{14}$$

Since the time of the last imperfect maintenance jT may range from 0 to $(i-1)T$, using Eq. (14), the probability of an inspection renewal at iT , $P_s(iT)$, is formulated as:

$$\begin{aligned}
 & P_s(iT) \\
 &= \sum_{j=0}^{i-1} P_m(jT) P(T_{ps} = iT | \text{since the last imperfect maintenance at } jT) \\
 &= \sum_{j=0}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x) \int_0^{(i-j)T-x} f_{X_{2,j+1}}(y) (1 - F_{X_{3,j+1}}((i-j)T - x - y)) dy dx
 \end{aligned} \tag{15}$$

4. The Cost model

In order to calculate the expected cost per unit time using the renewal theorem, the expected renewal cycle cost and length need to be formulated based on the renewal probabilities, shown as Eqs. (12) and (15), and the cost parameters for inspection, imperfect maintenance and replacement.

4.1. The expected renewal cycle cost $EC(T)$

- (1) If the system is renewed due to a failure at T_f , $T_f \in ((i-1)T, iT)$, the cost of a failure renewal cycle includes the cost of inspection, failure replacement and the imperfect maintenance previously and the cost caused by imperfect maintenance can be formulated by summing up all the possibilities before iT . Therefore, the cost of such an event is:

$$(i-1)C_s + C_f + \sum_{j=1}^{i-1} P_m(jT) C_{pm} \tag{16}$$

Considering a failure could fall into any of inspection intervals, according to Eqs. (12) and (16), the expected renewal cycle cost caused by a failure renewal by summing up all the possible realizations of i , $EC_f(T)$, is given as:

$$\begin{aligned}
 & EC_f(T) \\
 &= \sum_{i=1}^{\infty} ((i-1)C_s + C_f + \sum_{j=1}^{i-1} P_m(jT) C_{pm}) P_f((i-1)T, iT) \\
 &= \sum_{i=1}^{\infty} ((i-1)C_s + C_f + \sum_{j=1}^{i-1} P_m(jT) C_{pm}) \left(\sum_{j=1}^{i-1} P_m(jT) P((i-1)T < T_f < iT) \right) \\
 &= \sum_{i=1}^{\infty} ((i-1)C_s + C_f + \sum_{j=1}^{i-1} P_m(jT) C_{pm}) \left[\sum_{j=1}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x) \int_0^{(i-j)T-x} f_{X_{2,j+1}}(y) \right. \\
 &\quad \left. F_{X_{3,j+1}}((i-j)T - x - y) dy dx \right]
 \end{aligned} \tag{17}$$

(2) If the severe defective stage is detected at an inspection iT , using the similar way as Eq. (16), the corresponding cost is given by:

$$iC_s + C_{ps} + \sum_{j=1}^{i-1} P_m(jT)C_{pm} \tag{18}$$

According to Eqs. (15) and (18), the expected renewal cycle cost caused by an inspection renewal by summing up all the possible realizations of i , $EC_s(T)$ is expressed as:

$$\begin{aligned} EC_s(T) &= \sum_{i=1}^{\infty} (iC_s + C_{ps} + \sum_{j=1}^{i-1} P_m(jT)C_{pm})P_s(iT) \\ &= \sum_{i=1}^{\infty} (iC_s + C_{ps} + \sum_{j=1}^{i-1} P_m(jT)C_{pm}) \\ &\quad \left[\sum_{j=1}^{i-1} P_m(jT)P(T_{ps} = iT \mid \text{since the last imperfect maintenance at } jT) \right] \\ &= \sum_{i=1}^{\infty} (iC_s + C_{ps} + \sum_{j=1}^{i-1} P_m(jT)C_{pm}) \left[\sum_{j=1}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,j+1}}(x) \int_0^{(i-j)T-x} f_{X_{2,j+1}}(y) \right. \\ &\quad \left. (1 - F_{X_{3,j+1}}((i-j)T - x - y)) dy dx \right] \end{aligned} \tag{19}$$

4.2. The expected renewal cycle length $EL(T)$

Based on the pdf of a failure in $((i-1)T+z, (i-1)T+z+dz)$ shown in Eq. (13), the expected renewal cycle length caused by a failure renewal, $EL_f(T)$, is formulated as:

$$\begin{aligned} EL_f(T) &= \sum_{i=1}^{\infty} \int_0^T ((i-1)T + z) P_f((i-1)T + z, (i-1)T + z + dz) \\ &= \sum_{i=1}^{\infty} \int_0^T ((i-1)T + z) \sum_{j=1}^{i-1} P_m(jT)P((i-1)T + z < T_f < (i-1)T + z + dz) \\ &= \sum_{i=1}^{\infty} \int_0^T ((i-1)T + z) \left[\sum_{j=1}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j)T+z} f_{X_{1,j+1}}(x) \int_0^{(i-j)T+z-x} f_{X_{2,j+1}}(y) \right. \\ &\quad \left. f_{X_3}((i-j-1)T + z - x - y) dy dx \right] dz \end{aligned} \tag{20}$$

The expected renewal cycle length caused by an inspection renewal, $EL_s(T)$, is given as:

$$\begin{aligned} EL_s(T) &= \sum_{i=1}^{\infty} iT P_s(iT) \\ &= \sum_{i=1}^{\infty} iT \sum_{j=1}^{i-1} P_m(jT)P(T_{ps} = iT \mid \text{since the last imperfect maintenance at } jT) \\ &= \sum_{i=1}^{\infty} iT \left[\sum_{j=1}^{i-1} P_m(jT) \int_{(i-j-1)T}^{(i-j)T} f_{X_{1,i+1}}(x) \int_0^{(i-j)T-x} f_{X_{2,i+1}}(y) \right. \\ &\quad \left. (1 - F_{X_{3,i+1}}((i-j)T - x - y)) dy dx \right] \end{aligned} \tag{21}$$

4.3. The expected cost per unit time

Based on the expected cycle cost and length for a failure renewal and an inspection renewal, the expected cost per unit time taking the inspection interval T as a decision variable can be calculated using the renewal reward theorem [11], shown as:

$$C(T) = \frac{EC(T)}{EL(T)} = \frac{EC_f(T) + EC_s(T)}{EL_f(T) + EL_s(T)} \tag{22}$$

5. Numerical example

In this section a numerical example is presented to show the application of the proposed model to minimize the expected cost per unit time and find the optimal inspection interval. Since the Weibull distribution is one of the most commonly used distributions in reliability [16], this paper assumes that these three stages in the failure process follow Weibull distributions with a non-decreasing failure rate. The occurrence rate of the minor defective stage, the severe defective stage and failure with Weibull distribution is given by:

$$\lambda(x; a, b) = \begin{cases} a \cdot b \cdot (b \cdot x)^{a-1} & x \geq 0 \\ 0 & x < 0 \end{cases} \quad (23)$$

Since we cannot have the complete experimental data at present, the distribution parameters for these stages are assumed in Table 1. The cost parameters used in the cost model are shown in Table 2.

Table 1. Distribution parameters

a_1	b_1	a_2	b_2	a_3	b_3
2	0.5	2	0.333	2	0.25

Table 2. Cost parameters values

C_s	C_{pm}	C_{ps}	C_f
100	500	800	2000

Fig. 5 shows the expected renewal cycle cost with different values of T using Eqs. (17) and (19). It can be seen that the renewal cycle cost decreases firstly and then increases as T increases, finally turning to be relatively stable. It is due to that when the inspection interval is small, the expected renewal cycle cost is high because of the frequent inspection. However, once the inspection interval exceeds the expected failure time, failure occurs more easily and changing the inspection interval will not affect the failure process such that the ex-

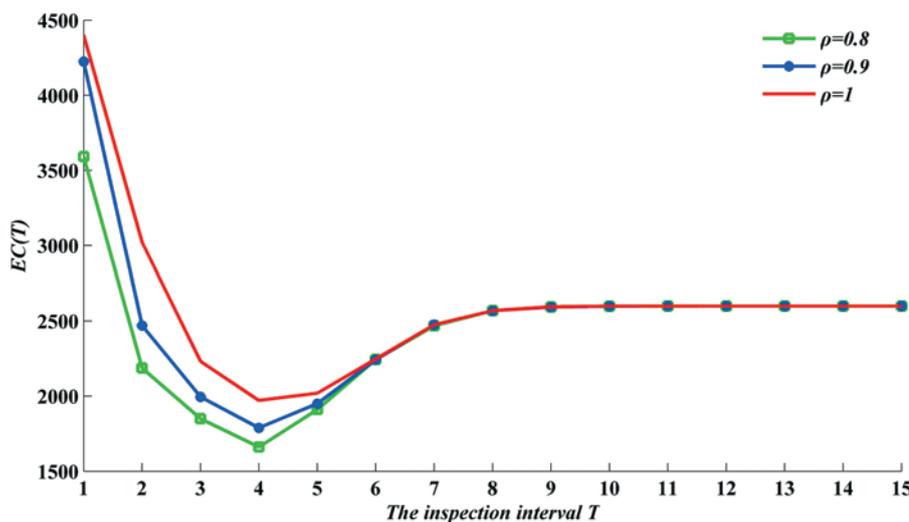


Fig. 5. The relationship between T and $EC(T)$

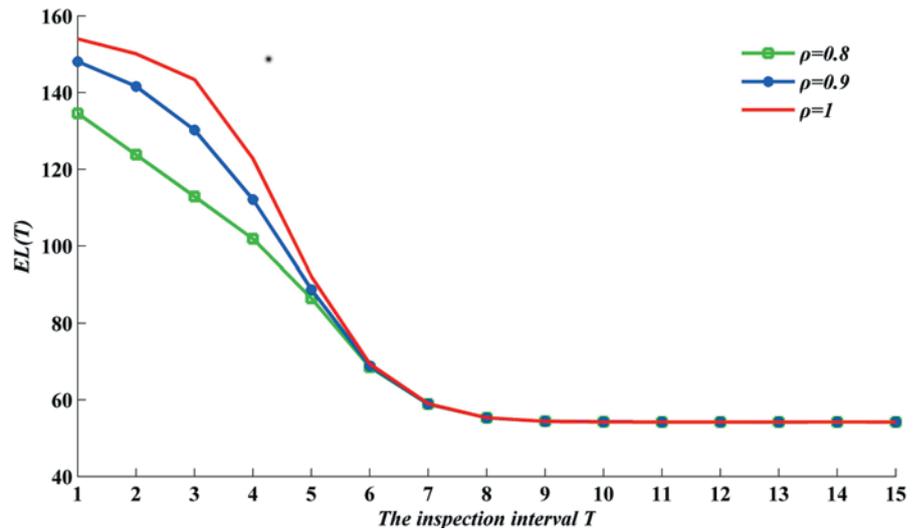


Fig. 6. The relationship between T and $EL(T)$

pected renewal cycle cost will tend to be constant. Moreover, in order to study the effect of imperfect maintenance on the expected renewal cycle cost, three different values of ρ is selected. One is $\rho=1$ which means the maintenance at the minor defective stage identification is perfect and the other two values $\rho=0.9$ and $\rho=0.8$ imply the imperfect maintenance. From Fig. 5, it is noted that the expected renewal cycle cost rises with the increase of ρ which shows that imperfect maintenance will decrease the expected renewal cycle cost and the smaller the value of ρ , the smaller the expected renewal cycle cost.

Fig. 6 shows the expected renewal cycle length in terms of different values of T using Eqs. (20) and (21). We can see that the expected renewal cycle length decreases monotonically and finally turns to be relatively stable. It can be explained that once the inspection interval exceeds the expected failure time, the failure must occur before inspection such that the expected renewal cycle length is constant. Moreover, the expected renewal cycle length also decreases with the reduction of ρ and the smaller value of ρ , the smaller the cycle length.

Fig. 7 shows the expected cost per unit time in terms of the inspection interval under different values of ρ using Eq. (22). From the results in Fig. 7, it can be seen that with the increase of the inspection interval, the expected cost per unit time firstly reduces and then increases.

It is what we expected that the smaller inspection interval will lead to the frequent inspections with more inspection cost and if the inspection interval exceeds the expected failure time, a failure renewal is required such that the expected cost per unit time tends to be constant. Also for three scenarios of ρ in Fig. 7, the trend of expected cost per unit time with different improve factors is same. It is confirmed that the smaller the value of ρ , the larger the expected cost per unit time. It is because that decreasing the value of ρ will decrease the expected cost and length simultaneously, but the expected renewal length falls faster. For the given parameters of distribution and cost, it can be seen from Fig. 7 that the optimal inspection interval $T^*=3$ is same although the improve factor is different. The optimal expected cost per unit time is 12.9009, 14.9409 and 17.9949 respectively when the improve factor is 1, 0.9 and 0.8. Therefore, the optimal inspection interval $T^*=3$ with

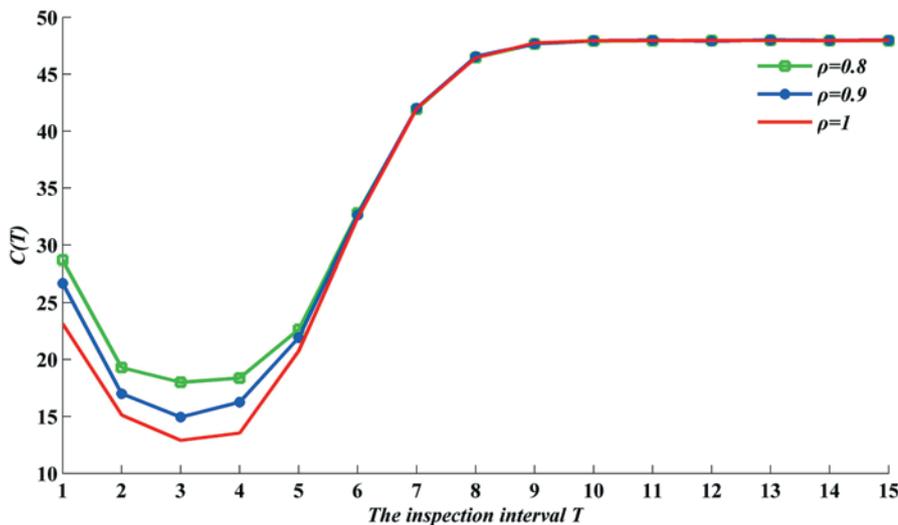


Fig. 7. The expected cost per unit time in terms of the inspection interval T

the minimal expected cost per unit time can be adopted to implement inspection and maintenance activities.

6. Conclusions

In this paper, an inspection optimization model is proposed based on a three-stage failure stage to optimize the inspection interval of bearings by minimizing the expected cost per unit time. The three states before failure using the concept of the three-stage failure process correspond to the three color scheme of bearings by SPM technique.

The maintenance at the minor defective stage is regarded as imperfect maintenance, which will affect the instantaneous rates of the minor defective stage, the severe defective stage and failure. The maintenance at the severe defective stage and failure can be viewed as perfect maintenance. The proportional age reduction model is used to model the effect of imperfect maintenance at the minor defective stage identification. The results from the numerical example show that the optimal inspection interval can be found using the proposed model. Moreover, imperfect maintenance will decrease the expected renewal cycle cost and length but increase the expected cost per unit time.

Further research along this line can be developed such as: (1) considering a finite time horizon, (2) considering the availability of spare parts, and (3) case studies need to be implemented to validate the model. These issues will be researched in the future.

Acknowledgments

The research report here was partially supported by the NSFC under grant numbers 71420107023, 71231001 and 71301009, the Fundamental Research Funds for the Central Universities of China under grant numbers FRF-MP-13-009A and FRF-TP-13-026A, and by the MOE PhD supervisor fund, 20120006110025.

References

- Bartholomew M, Christianson B, Zuo MJ. Optimizing preventive maintenance models. *Computational Optimization and Applications* 2006; 35(2): 261–279, <http://dx.doi.org/10.1007/s10589-006-6449-x>.
- Christer AH. Innovative decision making. In *Proceedings of the NATO Conference on the Role and Effectiveness of Theories of Decision in Practice*. Hodder and Stoughton, 1976: 368–377.
- Das AN, Sarmah SP. Preventive replacement models: an overview and their application in process industries. *European Journal of Industrial Engineering* 2010; 4(3):280–307, <http://dx.doi.org/10.1504/EJIE.2010.033332>.
- Hu HJ, Cheng GX, Li Y, Tang YP. Risk-based maintenance strategy and its applications in a petrochemical reforming reaction system. *Journal of Loss Prevention in the Process Industries* 2009; 22: 392–397, <http://dx.doi.org/10.1016/j.jlp.2009.02.001>.
- Jones B, Jenkinson I, Wang J. Methodology of using delay time analysis for a manufacturing industry. *Reliability Engineering and System Safety* 2009; 94: 111–24, <http://dx.doi.org/10.1016/j.res.2007.12.005>.
- Li Z, He ZJ, Zi YY, Chen XF. Bearing condition monitoring based on shock pulse method and improved redundant lifting scheme. *Mathematics and Computers in Simulation* 2008; 79: 318–338, <http://dx.doi.org/10.1016/j.matcom.2007.12.004>.
- Masaru F, Minoru K. SPM shock pulse method for diagnostic system of rotating roll bearing. *Japan Tappi Journal* 2003; 57(4): 52–57.
- Nicola RP and Dekker R. Optimal maintenance of multi-component systems: a review. In: Murthy DNP, Kobbacy AKS, editors. *Complex system maintenance handbook*. Amsterdam: Springer; 2008, http://dx.doi.org/10.1007/978-1-84800-011-7_11.
- Pierskalla WP, Voelker JA. A survey of maintenance models: the control and surveillance of deteriorating systems. *Naval Research Logistics Quarterly* 2006; 23: 353–388, <http://dx.doi.org/10.1002/nav.3800230302>.
- Robert BR, Jerome A. Rolling element bearing diagnostics—A tutorial. *Mechanical Systems and Signal Processing* 2011; 25: 485–520, <http://dx.doi.org/10.1016/j.ymsp.2010.07.01>.
- Ross SM. *Introduction to Probability Models*. USA: Elsevier, 2007.
- Tandon N, Yadava GS, Ramakrishna KM. A comparison of some condition monitoring techniques for the detection of defect in induction motor ball bearings. *Mechanical Systems and Signal Processing* 2007; 21: 244–256, <http://dx.doi.org/10.1016/j.ymsp.2005.08.005>.
- Wang HZ. A survey of maintenance policies of deteriorating systems. *European Journal of Operational Research* 2002; 139: 469–489, [http://dx.doi.org/10.1016/S0377-2217\(01\)00197-](http://dx.doi.org/10.1016/S0377-2217(01)00197-).
- Wang L, Hu HJ, Wang YQ, Wu W, He PF. The availability model and parameters estimation method for the delay time model with imperfect maintenance at inspection. *Applied mathematical modelling* 2011; 35: 2855–2863, <http://dx.doi.org/10.1016/j.apm.2010.11.070>.
- Wang W. A delay time based approach for risk analysis of maintenance activities. *Journal of the Safety and Reliability Society* 2003; 23(1): 103–113.
- Wang W. An inspection model based on a three-stage failure process. *Reliability Engineering and System Safety* 2011; 96(7): 838–848, <http://dx.doi.org/10.1016/j.res.2011.03.003>.

17. Wang W. An inspection model for a process with two types of inspections and repairs. *Reliability Engineering and System Safety* 2009; 94: 526–533, <http://dx.doi.org/10.1016/j.ress.2008.06.010>.
18. Wang W. An overview of the recent advances in delay-time-based maintenance modelling. *Reliability Engineering and System Safety* 2012; 106: 165–178, <http://dx.doi.org/10.1016/j.ress.2012.04.004>.
19. Wang W. Delay time modelling. In *Complex System Maintenance Handbook*. 2008; London, Springer: 345–370, http://dx.doi.org/10.1007/978-1-84800-011-7_1.
20. Wang W. Delay time modelling for optimized inspection intervals of production plant. *Handbook of Maintenance Management and Engineering*. 2009; London, Springer: 479–498.
21. Wang W. Models of inspection, routine service, and replacement for a serviceable one-component system. *Reliability Engineering and System Safety* 2013; 116: 57–63, <http://dx.doi.org/10.1016/j.ress.2013.03.006>.
22. Wang W, Banjevic D, Pecht MG. A multi-component and multi-failure mode inspection model based on the delay time concept. *Reliability Engineering and System Safety* 2010; 95(8): 912–920, <http://dx.doi.org/10.1016/j.ress.2010.04.004>.
23. Wang W, Zhao F, Peng R. A preventive maintenance model with a two-level inspection policy based on a three-stage failure process. *Reliability Engineering and System Safety* 2014; 121: 207–220, <http://dx.doi.org/10.1016/j.ress.2013.08.007>.

Ruifeng YANG

Mechanical Engineering College
Six xi, Heping West Road Number 97
Shijiazhuang, 050003, Hebei province, China

Fei ZHAO

Northeastern University at Qinhuangdao
No.143, Taishan Road, Economic and Technological Development Zone
Qinhuangdao, 066004, Hebei province, China

Jianshe KANG**Haiping LI**

Mechanical Engineering College
Six xi, Heping West Road Number 97
Shijiazhuang, 050003, Hebei province, China

Hongzhi TENG

Mechanical Engineering College
Six xi, Heping West Road Number 97
Shijiazhuang, 050003, Hebei province, China

E-mail: rfyangphm@163.com, Zhaofei.19841027@163.com,
jskang201206@126.com, hp_li0929@163.com, tengzh@163.com
